

# Libec

LX	New
RS	New
Remote Control	New
Accessories	New

## LX / RS



## Libec

**HEIWA SEIKI KOGYO CO.,LTD. - Headquarters**

978-1 Nishibukuro, Yashio-City, Saitama, 340-0833 Japan

TEL: +81(0) 48 995 1301

FAX: +81(0) 48 997 0804

**[www.libec-global.com](http://www.libec-global.com)**

**Libec Sales of America, Inc - U.S. Sales office**

377 Van Ness Av., Suite 1201 Torrance, CA 90501 USA

TEL: +1 310 787 9400

FAX: +1 310 787 9422

**[www.libecsales.com](http://www.libecsales.com)**

12/02

Specifications are subject to change without notice. The colors in this brochure may differ from actual products because of the printing color inks or photographic conditions.

# LX New

Best value in the range



- Trace every motion from start to finish with its supreme torque system
- Outstanding rigidity and payload. Completely new tripod design.
- A high-grade spreader and large rubber feet included with standard package
- Equipped with a sliding plate (sliding range of +/-40mm / 1.6") and 3/8" spare screw\*

\*3/8" spare screw only equipped in LX7 and LX7 M.



## LX5 New



Weight	5.5kg / 12.1lb
Height	56 to 166cm / 22.0 to 65.5"
Ball diameter	75mm
Section	2STAGE

## LX5 M New



Weight	5.2kg / 11.4lb
Height	81 to 165.5cm / 32.0 to 65.0"
Ball diameter	75mm
Section	2STAGE

## LX7 New



Weight	5.5kg / 12.1lb
Height	56 to 166cm / 22.0 to 65.5"
Ball diameter	75mm
Section	2STAGE


## LX7 M New




Weight	5.2kg / 11.4lb
Height	81 to 165.5cm / 32.0 to 65.0"
Ball diameter	75mm
Section	2STAGE



Payload	4kg / 9.0lb
Counterbalance	FIX
Drag mode	FIX
Tilt angle	+90° / -80°
Temperature range	-20°C / -4°F to +60°C / +140°F
Camera plate	Sliding plate
Sliding range	+/-40mm / 1.6"
Plate attachment	1/4" screw with video pin

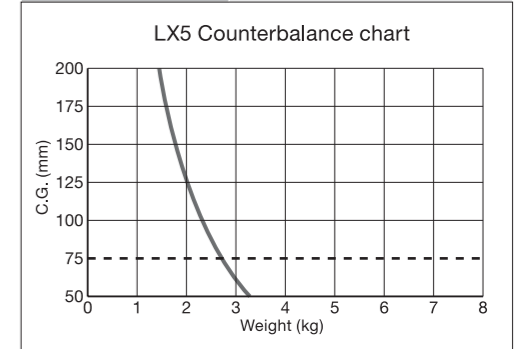

Payload	8kg / 17.5lb
Counterbalance	FIX
Drag mode	FIX
Tilt angle	+90° / -80°
Temperature range	-20°C / -4°F to +60°C / +140°F
Camera plate	Sliding plate
Sliding range	+/-40mm / 1.6"
Plate attachment	1/4" screw with video pin
Spare screw	3/8" screw

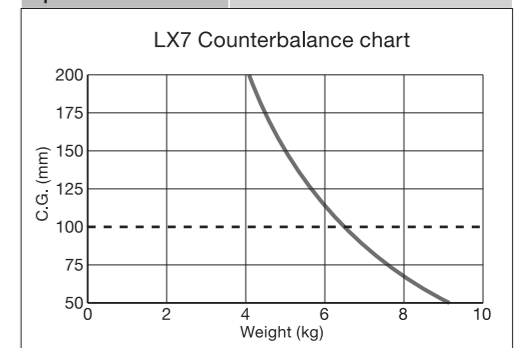



# RS

## The technology you can reach

- Ideal counterbalance
- Impeccable camerawork thanks to a new drag system
- Low-temperature characteristics represent a giant leap forward compared to conventional sets
- Outstanding rigidity. Completely new tripod design.

## Advanced RS series with upgraded functions **New**

### Equipped with LED bubble level

250/350 series now provided with a LED bubble level.

### Maximum height of 173cm/68.0"

(450 series only)


Increased maximum height for the RT40RB(with a floor spreader attached) is 6cm/2.5" higher than our previous models.

### Advanced designed extendable panhandle

All equipped with extendable panhandles and rubber grips for precise camera movements.

### A new tripod case with highly developed durability and usability (450 series only)


The RC-50 is a sophisticated tripod case equipped with a bottom protector, shoulder pad and handle grip.

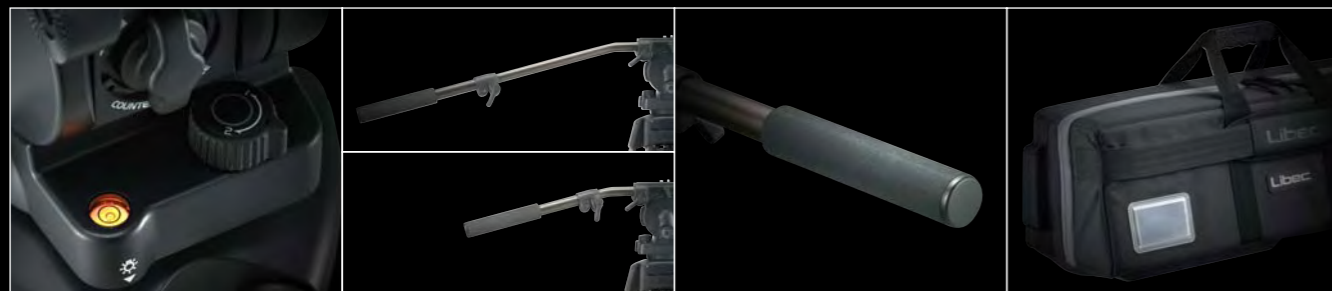

### RH25R **New**



Counterbalance range	1.8 to 5kg / 4.0 to 11.0lb
Payload	6kg / 13.0lb
Counterbalance	Continuous
Drag mode	2STEP
Tilt angle	+90° / -70°
Temperature range	-40°C / -40°F to +60°C / +140°F
Bubble level	Illuminated
Camera plate	Sliding plate
Sliding range	+/-40mm / 1.6"
Plate attachment	1/4" screw with video pin
Spare screw	1/4" and 3/8" screws
Weight	2.5kg / 5.5lb

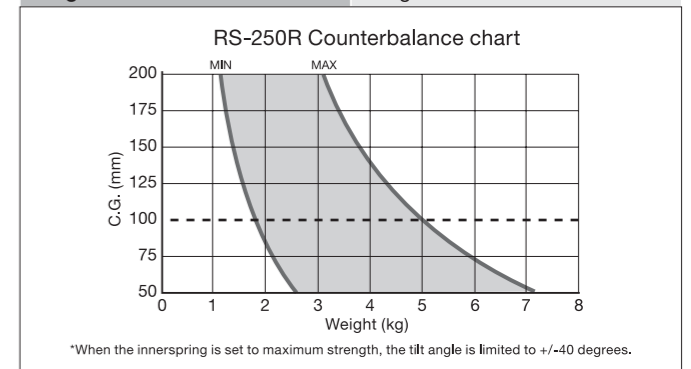

### RS-250R **New**

RH25R / RT30B / SP-2B / RC-30  
System with floor spreader



Weight	6kg / 13.2lb
Height	55 to 165cm / 21.5 to 65.0"
Ball diameter	75mm
Section	2STAGE

### RS-250RM **New**

RH25R / RT30B / BR-2B / FP-2B / RC-30  
System with mid-level spreader




Weight	5.7kg / 12.5lb
Height	80 to 164.5cm / 31.5 to 65.0"
Ball diameter	75mm
Section	2STAGE

### RH35R **New**




Counterbalance range	3 to 7.5kg / 6.5 to 16.5lb
Payload	9kg / 20.0lb
Counterbalance	Continuous
Drag mode	Free plus 3STEP
Tilt angle	+90° / -70°
Temperature range	-40°C / -40°F to +60°C / +140°F
Bubble level	Illuminated
Camera plate	Sliding plate
Sliding range	+/-40mm / 1.6"
Plate attachment	1/4" screw with video pin
Spare screw	1/4" and 3/8" screws
Weight	2.7kg / 5.9lb

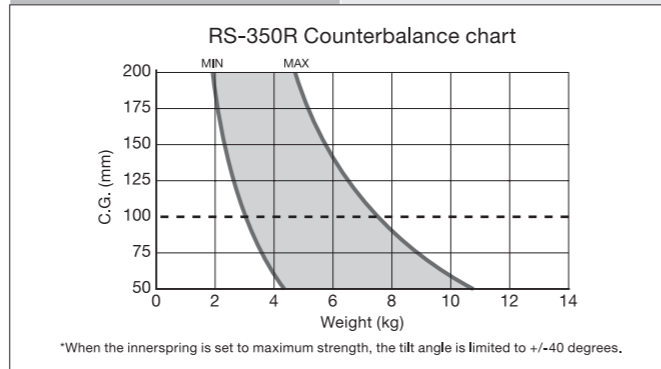

### RH45R **New**



Counterbalance range	4.5 to 10.5kg / 10.0 to 23.0lb
Payload	12kg / 26.5lb
Counterbalance	Continuous
Drag mode	Free plus 3STEP
Tilt angle	+90° / -70°
Temperature range	-40°C / -40°F to +60°C / +140°F
Bubble level	Illuminated
Camera plate	Sliding plate
Sliding range	+/-40mm / 1.6"
Plate attachment	1/4" screw with video pin
Spare screw	1/4" and 3/8" screws
Weight	2.7kg / 5.9lb

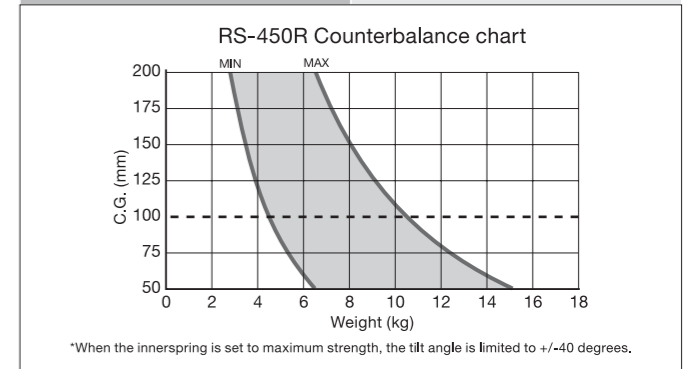

### RS-350R **New**

RH35R / RT30B / SP-2B / RC-30  
System with floor spreader



Weight	6.2kg / 13.6lb
Height	56 to 166cm / 22.0 to 65.5"
Ball diameter	75mm
Section	2STAGE

### RS-350RM **New**

RH35R / RT30B / BR-2B / FP-2B / RC-30  
System with mid-level spreader



Weight	5.9kg / 13.0lb
Height	81 to 165.5cm / 32.0 to 65.0"
Ball diameter	75mm
Section	2STAGE

### RS-450R **New**

RH45R / RT40RB / SP-2B / RC-50  
System with floor spreader



Weight	6.7kg / 14.7lb
Height	63 to 173cm / 25.0 to 68.0"
Ball diameter	75mm
Section	2STAGE

### RS-450RM **New**

RH45R / RT40RB / BR-4B / FP-2B / RC-50  
System with mid-level spreader



Weight	6.5kg / 14.3lb
Height	85 to 173cm / 33.5 to 68.0"
Ball diameter	75mm
Section	2STAGE

## Zoom and focus control for LANC(Sony/Canon) and Panasonic cameras **ZFC-5HD New**

### All-in-one zoom and focus control for LANC(Sony/Canon) and Panasonic cameras



The ZFC-5HD offers precise and variable zoom speed control available for LANC\*(Sony/Canon) and Panasonic cameras, controlled by a selector switch. Equipped with a 2-step zoom speed control for LANC cameras. In addition, the ZFC-5HD is equipped with a focus control button for LANC and a focus dial for Panasonic cameras. Exclusively for LANC cameras, the ZFC-5HD has an on/off remote power switch function which allows your camera to power on/off remotely. This is ideal when shooting with a jib arm or crane. Can be clamped on various equipment: tripod panhandles, jib arm and crane weight bars, stabilizers, monopods and other accessories.

\*LANC is a registered trademark of Sony Corporation.

	LANC	Panasonic
Zoom	✓	✓
Focus	✓	✓
REC/STOP	✓	✓
Zoom speed switch	✓	
Camera power ON/OFF	✓	
Weight	0.16kg / 0.4lb	
Size	75 x 50mm / 3 x 2"	
Cable length	0.7m / 2.3'	

The end of the cable splits into two parts with 2.5mm submini-jack and 3.5mm mini-jack on each end. When using Panasonic cameras, simultaneous control of zoom and focus can be achieved by plugging 2.5mm and 3.5mm jacks into the zoom and focus terminals, respectively.



### Extension focus cable for Panasonic cameras **EX-530HD New**



Length 5.3m / 17.5'


## Zoom control for LANC(Sony/Canon) and Panasonic cameras **ZC-3DV**

Universal controller for LANC and 2.5mm submini-jack, simply change the switch.



## Zoom control for ENG lenses **ZC-9Pro**

Can be used with both Canon and Fujinon lenses by simply changing the switch.

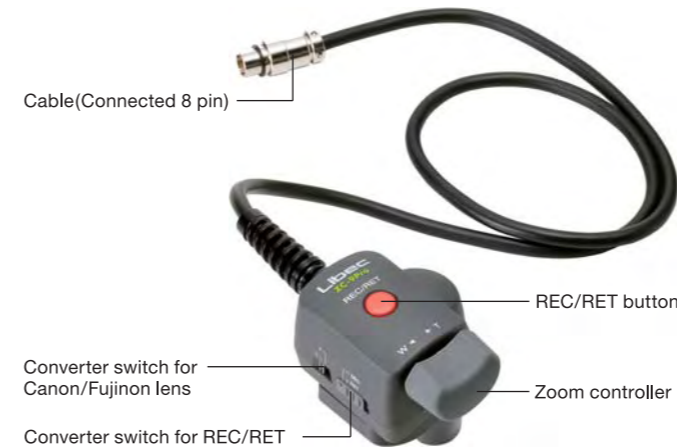

## SONY PMW-EX cameras connectable zoom control **ZC-9EX**

Can be used same as the ZC-9Pro by just removing the EX adapter.



\*The function is not available for XDCAM EX cameras.

## Extension zoom cable for LANC (Sony/Canon) and Panasonic cameras **EX-530DV New**



Length 5.3m / 17.5'

## Extension zoom cable for ENG lenses **EX-530Pro New**



Length 5.3m / 17.5'

## 12pin adapter **A-12P**

Use for 12pin connector



## SONY PMW-EX cameras adapter cable **A-9EX New**

The A-9EX is a conversion adapter that allows you to connect Sony's PMW-EX cameras to zoom controls for Fujinon's ENG lenses.



## LANC/AV adapter cable **A-3AV**

A-3AV is a conversion cable that allows you to connect LANC\* zoom control to Sony handycam\* equipped with AV remote terminal.

\*LANC and Handycam are registered trademarks of Sony Corporation.



## Tripod case **RC-50 New**

The RC-50 is a stylish tripod case, designed for quick and easy storage of your tripod, with its high durability and lightweight portability

- Designed with end-to-end wide openings, providing quick and easy access to your tripod
- Surfaces are fully equipped with solid padding to provide shock protections during transportation
- Made of water resistant PU coated polyester equipped with a heavy-duty zip fastener
- The bottom protector absorbs external impacts during transportation
- Designed for a comfortable use, the main handle is plastic-gripped, a tough side-handle is attached, and also comes with padded shoulder strap
- Equipped with an inner pocket to store accessories such as a panhandle



Padded shoulder strap



Protector

Inner pocket with zipper

Handle grip

Side handle

## Adapter plate **AP-1**



Built from magnesium material, it's rigid with a light weight of only 200g/0.4lb. The AP-1 helps you to instantly attach a small handheld camera to a tripod adapter.



## Adapter plate **AP-5 New**



The AP-5 includes a camera platform and sliding plate. Using the 1/4" and 3/8" screw holes on its base, you can mount the platform on various camera support equipment. In addition, the side surface of the platform has 1/4" and 3/8" screw holes for attaching accessories. 1/4" and 3/8" spare screws are included and stored in the platform.

Weight	0.4kg / 1.0lb
Sliding range	80mm / 3.1"



## Accessory support kit **AS-7K (A-7 included)**



A multiple accessory support that supports mounting of LCD monitors and other accessories.

Length	261mm / 10.3"
Attachment	1/4" screw
Weight	0.35kg / 0.8lb

Can be attached to cameras and accessory plates and also Libec heads by using accessory support adapter included in the kit\*. Fitting angle can be adjusted flexibly that enables suitable positioning of accessories.



\*Not attachable to TH-650DV.

## Accessory support adapter **A-7**



Can be attached to Libec heads and jib arms. \*Accessories can be fitted by using 1/4" and 3/8" screw holes.

\*Not attachable to TH-650DV.